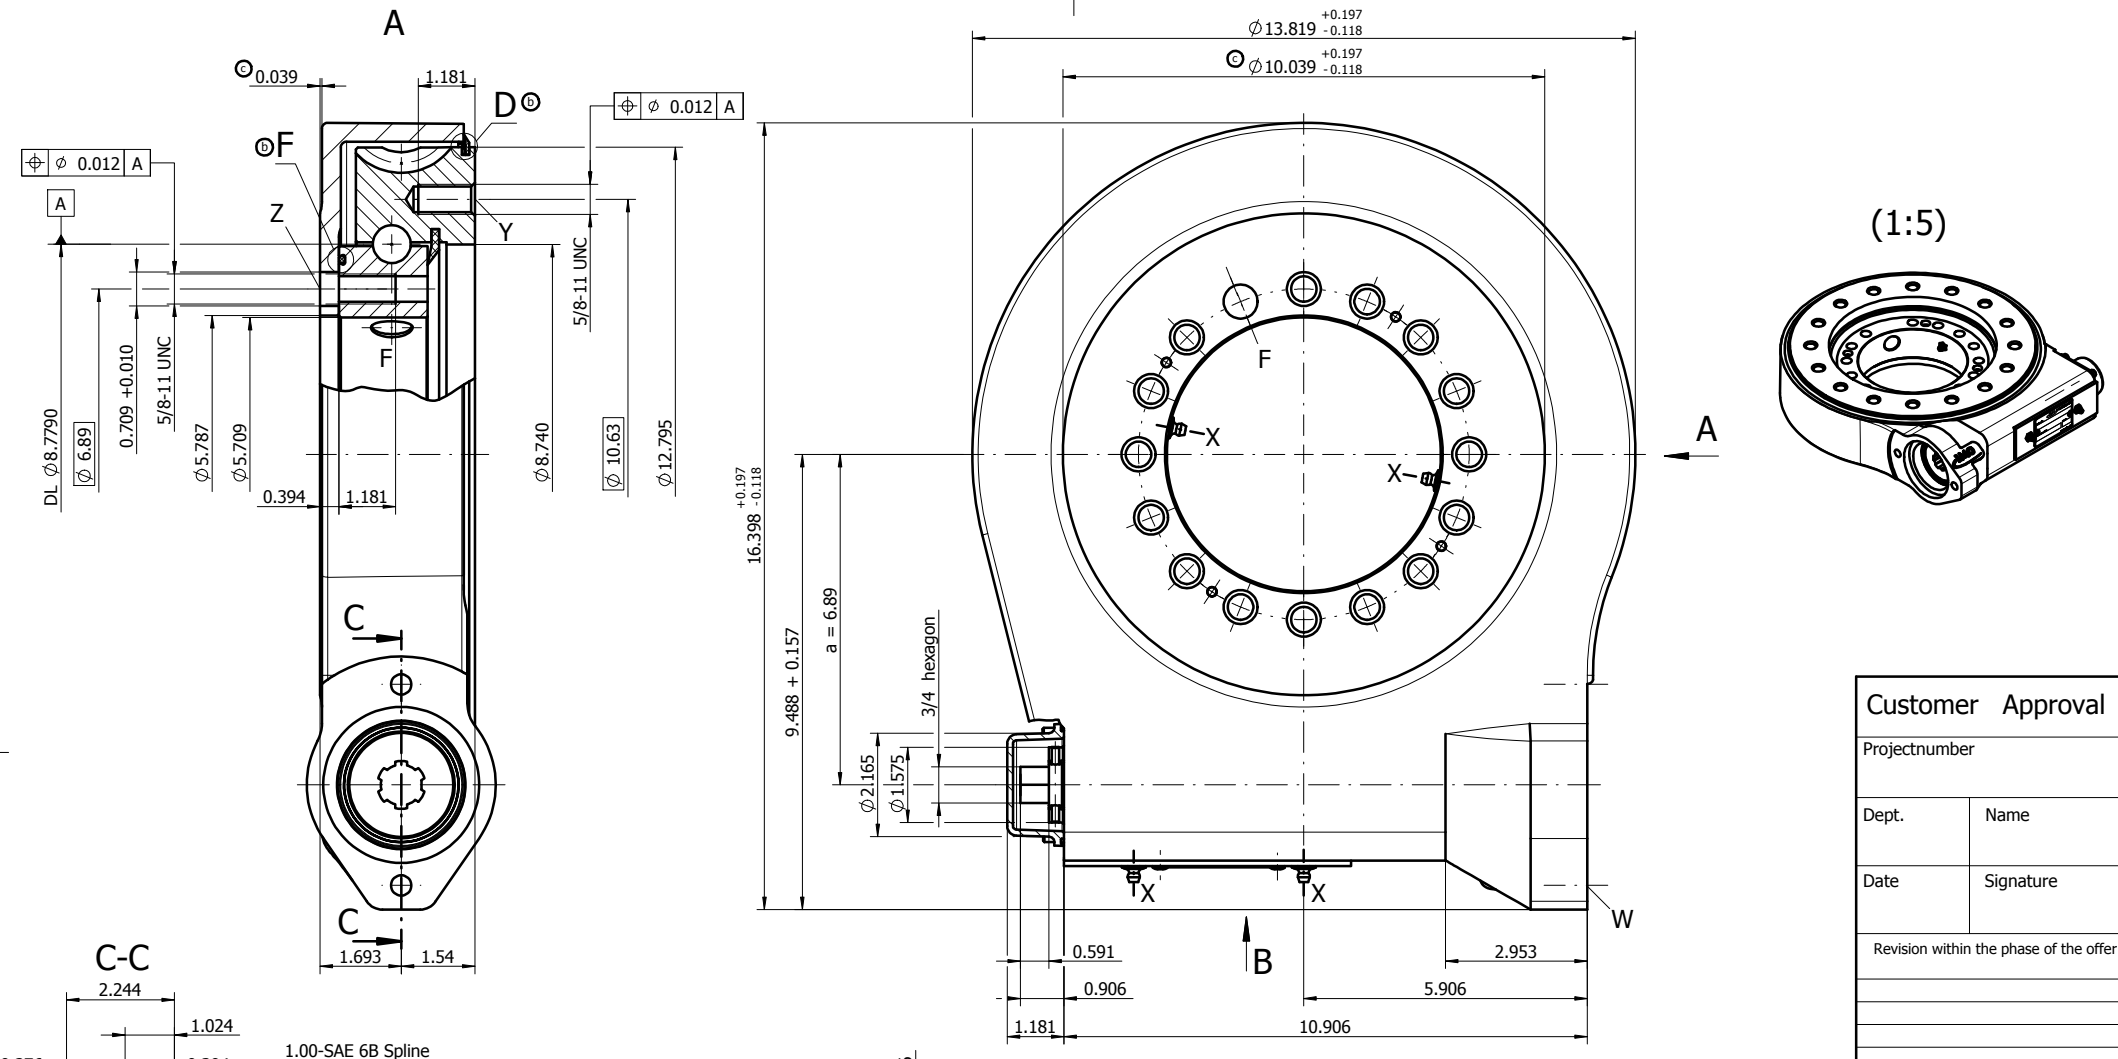

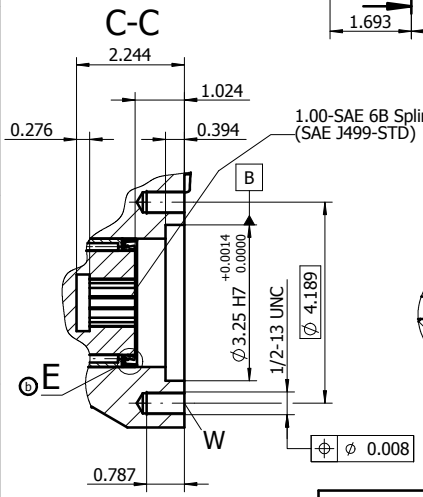

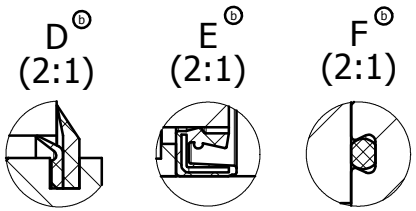

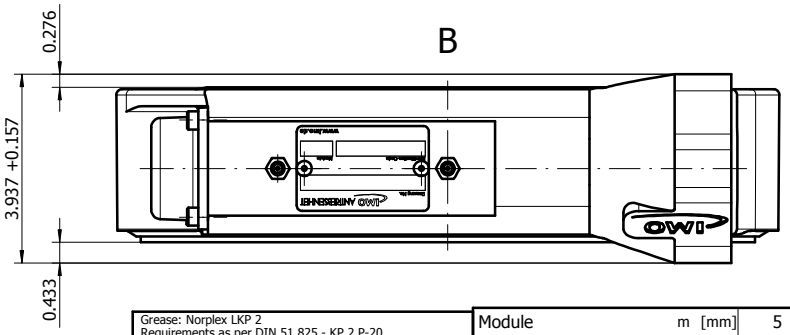

Dimensions are in inches

Primer housing-crude cast surface	Clearance	
Paint: single coat lacquer Product: Relonit 626-2K PUR Color: RAL 7033 cement grey	radial clearance	0-preloaded
	axial tilting clearance	0-preloaded

Grease: Norplex LKP 2
Requirements as per DIN 51 825 - KP 2 P-20

bore holes	(equally spaced)
W	2 bore holes 1/2-13 UNC-0.787 deep
X	4 grease nipples SAE J-H1-9/16"-1/8" PTF
Y	16 bore holes 5/8-11 UNC-1.181 deep
Z	15 bore holes 5/8-11 UNC-1.181 deep / Ø0.709 pitch 16

Module	m [mm]	5
Number of starts of the worm	[-]	1
Gear ratio	i [-]	62
Number of drives	[-]	1

Customer Approval	
Projectnumber	
Dept.	Name
Date	Signature
Revision within the phase of the offer	

Rev.	Modification	Date	Name
c	Auf Gussgehäuse umgestellt	08.10.09	orost
b	O-Ring, 2ter Dichtring und RWDR hinzu	06.10.09	orost
a	Zeichnung überarbeitet	06.10.09	orost

Metric
Dimensions are in [mm], unless otherwise specified
Article No. 06370.000.0C.000000
Scale 1:2
Weight ca. kg
Material
Specification
Unspecified tolerances as per DIN ISO 2768-g
Edges DIN 6784 0.5x45 deg

	Date	Name
Prep.	09.04.09	bseger
Appr.	09.10.09	orost
A2	CAD-Drawing	

Benennung/Item
Slew Drive WD-LA
-
Drawing No.
WD-LA 0223/3-06370
Sheet 2
Sheets Total: 5
Subst. for
Subst. of